5.1 Classroom

5.1.1 Perspective and Application Guidelines

5.2 Exam Room

5.2.1 Perspective and Application Guidelines

5.3 Conference Room

5.3.1 Perspective and Application Guidelines

5.4 Waiting Area

5.4.1 Perspective and Application Guidelines

5.5 Restroom

5.5.1 Perspective and Application Guidelines

5.6 Administrative Office

5.6.1 Perspective and Application Guidelines

5.7 Dining Room

5.7.1 Perspective and Application Guidelines

5.8 Patient Room

5.8.1 Perspective and Application Guidelines


5.9 Corridor

5.9.1 Perspective and Application Guidelines


Materials, Finishes and Lighting

EOC-US

Perspective- Classroom

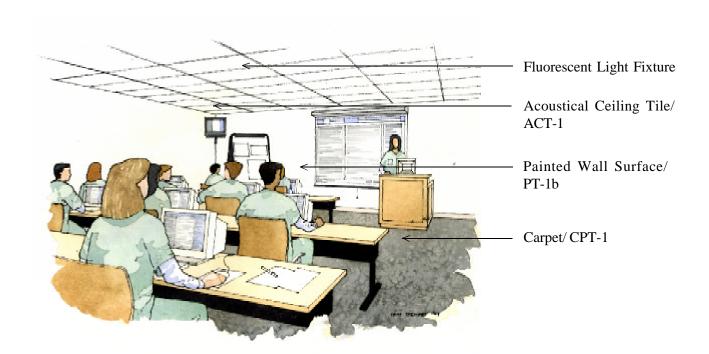

Floor Plan of Classroom

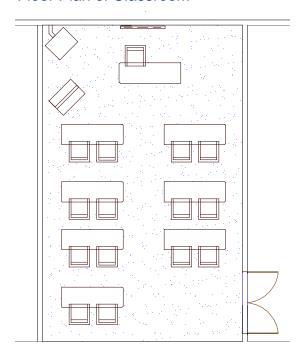


5.1.1 Application Guidelines for Classroom


- WallsPT-1b

 Walls should be painted "Neutral" in color with eggshell finish. Architectural features should always be painted a Neutral color.
- Ceilings.....ACT-1 or GYP
- Doors and frames......PT-1d
 Doors and frames should be painted with semi-gloss for ease of maintenance.
- Lighting.......2x2 Fluorescent
 Lighting does not appear on finish schedule. A
 2x2 fluorescent fixture is recommended for Classrooms. Provide downlighting with dimming devices around perimeter of room.

Perspective- Exam Room

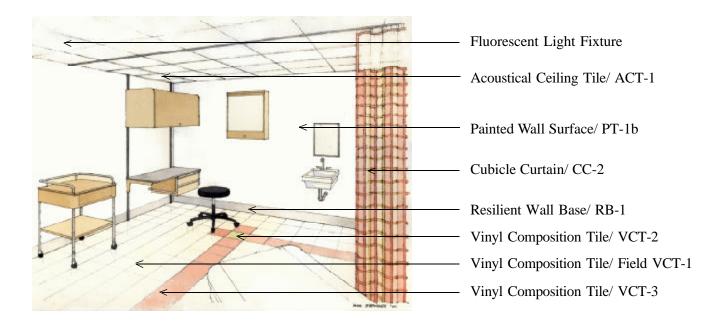

Floor Plan of Exam Room

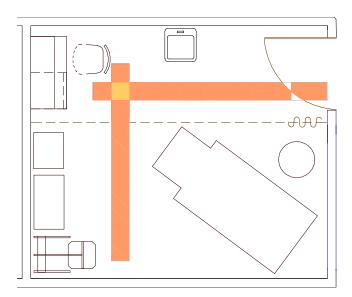


5.2.1 Application Guidelines for Exam Room


- Ceilings..... ACT-1
- Doors and frames......PT-1d
 Doors and frames should be painted with semi-gloss for ease of maintenance.

1

Perspective- Conference Room

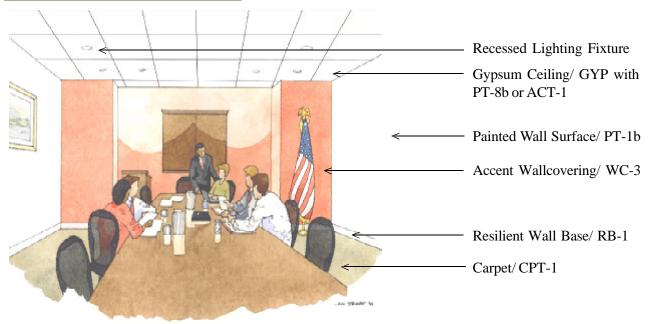


Floor Plan of Conference Room

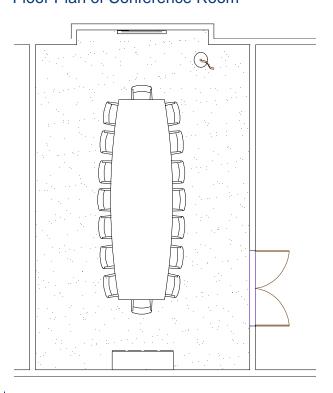


5.3.1 Application Guidelines for Conference Room

- Ceilings.....GYP/ PT-8b or ACT-1
- **Doors and frames**......**PT-1d**Doors and frames should be painted with semigloss for ease of maintenance.
- Lighting.......2x2 Fluorescent
 Lighting does not appear on finish schedule. A
 2x2 fluorescent fixture is recommended for Conference Rooms. Provide downlighting with dimming devices around perimeter of room.

Perspective-Waiting Area

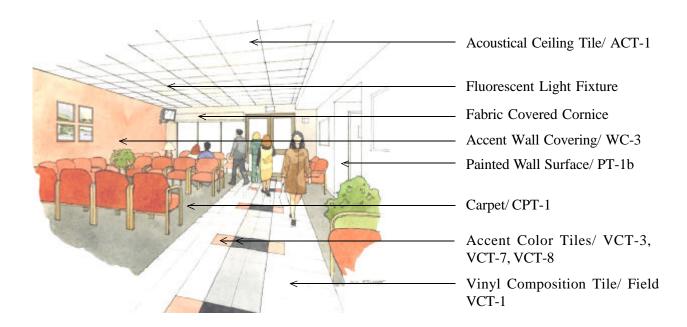

Floor Plan of Waiting Area

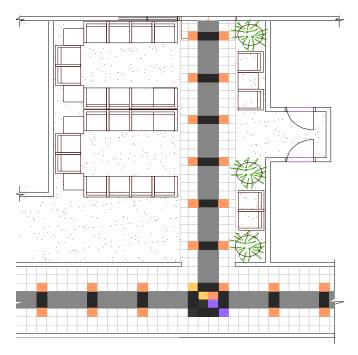

5.4.1 Application Guidelines for Waiting Area

• Floors...... CPT-1 and/or VCT-1, VCT-3, VCT-7, VCT-8


Vinyl composition tile defines the major traffic pattern areas and adds interest to the space, assists with wayfinding, and supports design continuity by corresponding with patterns throughout the facility. Carpet can be used to define space and reduce noise.

- Walls..... PT-1b, WC-3
 - Walls should be painted "Neutral" in color with eggshell finish. Architectural features (i.e. handrails, door frames and window frames) should always be painted a Neutral color. One wall should have paint or wallcovering using an accent color recommended in this Volume. In the Waiting Area, the recommended accent wall is a side wall.
- Ceilings..... ACT-1 or PT-8b
- Doors and frames...... PT-1d


Doors and frames should be painted with semigloss for ease of maintenance.

- **Cornice**......Window treatments do not appear on finish schedules.
- Although the Military Handbook 1191 allows carpet to be used as a floor finish in these areas, MEDCOM recommends substituting carpet with VCT with accent colors.

Perspective- Restroom

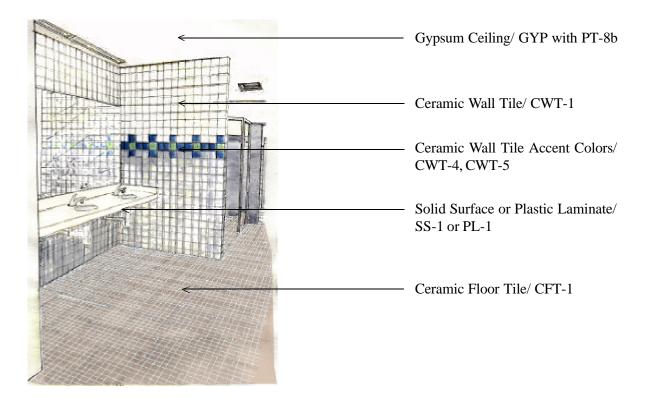

Floor Plan of Restroom

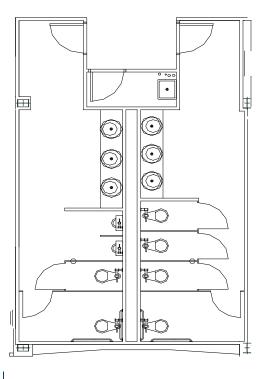


5.5.1 Application Guidelines for Restroom

- Floors..... CFT-1
- Walls..... PT-1d, CWT-1, CWT-4, CWT-5


Walls should be painted "Neutral" in color with semi-gloss finish. Any pattern in ceramic tile is to be simple in design.

- Ceilings..... GYP/ PT-8b
- **Doors and frames...... PT-1d**Doors and frames should be painted with semigloss for ease of maintenance.
- Solid Surface............ SS-1 or PL-1 Solid Surface or PL-1 plastic laminate.

Perspective- Administrative Office

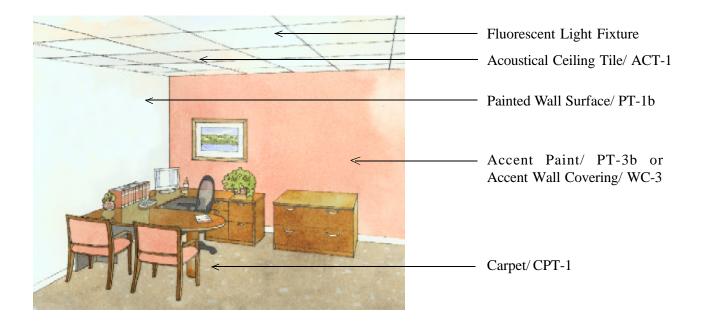

Floor Plan of Administrative Office



5.6.1 Application Guidelines for Administrative Office

- Walls..... PT-1b with PT-3b or WC-3

Walls should be painted "Neutral" in color with eggshell finish. One wall should have accent color paint or wallcovering recommended in this Volume. Typically the accent wall should be the wall facing you as you enter the room.

- Ceilings..... ACT-1
- Doors and frames...... PT-1d
 Doors and frames should be painted with semi-gloss for ease of maintenance.

Perspective- Dining Room



Recessed Light Fixture

Painted Architectural Detail/ PT-1d

Painted Accent Wall/ PT-3b


Painted Wall Surface/ PT-1b

Vinyl Composition Tile/ Field VCT-1

Carpet/ CPT-1

Vinyl Composition Tile Accent Colors/ VCT-2, VCT-3, VCT-6, VCT-7, VCT-8

Floor Plan of Dining Room



5.7.1 Application Guidelines for Dining Room

Carpet can be used in Dining Areas to define the space. Vinyl composition tile should be used in major traffic areas and in front of servery. The use of accent colors in tile adds interest and supports design continuity throughout the facility.

• Walls PT-1b with PT-3b or WC-3

Walls should be painted "Neutral" in color with eggshell finish. One wall should have accent color paint, wallcovering or tile recommended in this Volume. Use of tile should be limited to the servery area only. Typically the accent wall should be the wall facing you as you enter the room.

- Ceilings ACT-1 or GYP/ PT-8b
- Doors and frames...... PT-1d
 Doors and frames should be painted with semi-gloss for ease of maintenance.
- Although the Military Handbook 1191 allows carpet to be used as a floor finish in these areas, MEDCOM recommends substituting carpet with VCT with accent colors.

Perspective- Patient Room



Acoustical Ceiling Tile/ ACT-1

Cornice Window Treatment Mini Blinds


Painted Wall Surface/ PT-1b

Cubicle Curtains/ CC-2

Accent Wall Covering/ WC-3

Vinyl Composition Tile with Accent Color Tiles/ VCT-1, VCT-2, VCT-3


Floor Plan of Patient Room




5.8.1 Application Guidelines for Patient Room

- Ceilings..... ACT-1
- Doors and frames......PT-1d
 Doors and frames should be painted with semi-gloss for ease of maintenance.
- Cubicle Curtains CC-2
 Patterns and colors should compliment the accent colors chosen for the area in which they will be installed. In smaller facilities, utilize solids or smaller patterns of the same color so as not to overpower the space.

Perspective- Corridor

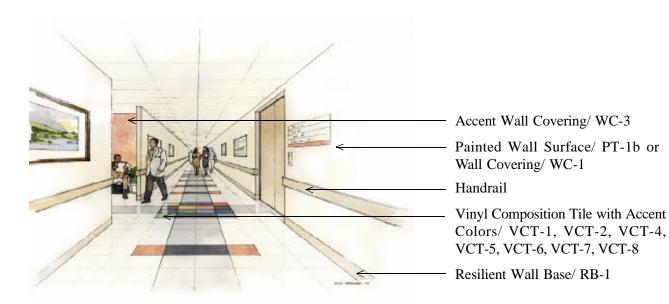

Floor Plan of Corridor



5.9.1 Application Guidelines for Corridor

• Floors...... VCT-1, VCT-2, VCT-4, VCT-5, VCT-6, VCT-7, VCT-8

Vinyl composition tile with accents tiles defines major traffic pattern areas, adds interest to the space, assists with wayfinding, and supports design continuity by corresponding with patterns throughout the facility. Large patterns incorporating all accent colors are recommended at the intersections of converging Corridors, elevator Lobbies, and in front of Nurses Stations. These patterns may also be achieved with other flooring finishes recommended in this Volume.

- WallsPT-1b or WC-1, WC-3
 Corridor walls are neutral in color and finishes are recommended to be either protective wallcovering, paint or vinyl wallcovering. All architectural elements are to remain neutral in color (door and window frames, wall bases and handrails, cornices, etc.). An accent wall should be chosen with discretion so as not to overpower the space. Appropriate use of color would be a wall of a Waiting Area or on the end wall in a Corridor contributing to a comprehensive wayfinding system.
- Ceilings......ACT-1 or PT-8b
- Doors and frames.......PT-1d

 Doors and frames should be painted with semigloss for ease of maintenance.

Materials, Finishes and Lighting

EOC-US
Applications Section 5